



Radio hand-held scanner
BCS 160^{ex} BT for 1D and PDF barcodes

Features

- Insensitive to direct sunlight (100 000 lux)
- High level of impact resistance
- Reads a wide range of barcodes
- All standard 1D and PDF barcodes
- 500 scans per second
- RS232/RS422 or USB interface via base station
- Good-read feedback with LED signal, acoustic signal and vibration
- Base station also usable in hazardous areas
- Connection of up to 7 BCS 160^{ex} BT Radio hand-held scanners to one base station

Description

The sturdy radio hand-held scanner BCS 160^{ex} BT from BARTEC offers all the highly developed ergonomic and functional features required in industrial applications.

The scan line is wider than in conventional laser scanners and therefore easier to see. This makes aiming at the barcode much easier – even on hard-to-access objects. Its high scanning and decoding frequency of 500 Hz enables easy scanning of a large number of barcodes in quick succession.

The BCS 160^{ex} BT has a robust enclosure that can withstand use even in the toughest conditions. Even dropping onto the ground several times from a height of 2 m will not damage this scanner.

Design

The Radio hand-held scanner BCS 160^{ex} BT with integrated decoder is designed for wireless data capture in real time and ensures a highly efficient operation in manufacturing halls, warehouses and other sites.

When capturing data, the user can move freely up to a radius of 30 m around the base station. The Radio hand-held scanner BCS 160^{ex} BT is produced with the "intrinsically safe" type of protection and can be used directly in hazardous areas Zone 1, 2 and Zone 21, 22.

Base station

The base station is the charging station (cradle) and also serves as a radio receiver station and can be installed in either hazardous or non-hazardous areas. The RS232 or USB cable enables a connection to all standard hosts.

Explosion protection

Ex protection type

Ex II 2G Ex ib IIC T4 Gb
-20 °C ≤ T_a ≤ +50 °C

Ex II 2D Ex ib IIC T135 °C Db

Certification

IBExU 13 ATEX 1084

Technical data

Ambient temperature

-20 °C to +50 °C

Storage temperature

-30 °C to +70 °C

Charging temperature

0 °C to +50 °C

Decoding capabilities

all standard 1D barcodes,
PDF barcodes only with PDF scan engine

Scan rate

ca. 500 scans per second

Good-read feedback

LED signal, acoustic signal and vibration

Light source

630 nm laser diode

Reading distance

up to 80 cm (for 0.5-mm code)

Connection of

Ex base station to the supply unit

RS232	maximum length	9.8 m
USB	maximum length	3.8 m

Non-Ex base station to the host

RS232	maximum length	9.8 m
USB	maximum length	3.8 m

Supply unit to the host

RS232	maximum length	20 m
RS422	maximum length	1000 m
USB	maximum length	5 m

Radio specifications

Radio range

max. 30 m (with unobstructed view)

Frequency

Bluetooth V2.1 EDR Class 2
2.4 to 2.4835 GHz (ISM Band)

Weight

approx. 266 g incl. battery

Air humidity

5 % to 95 % (non-condensing)

Dimensions (height x width x depth)

104 mm x 76 mm x 185 mm

Protection class

IP 65



Radio BCS 160^{ex} hand-held scanner BT for ATEX Zone 1 and 21

BARTEC

Operating voltage Bluetooth base station

4.9 V to 5.6 V

Supply to the Ex version via corresponding power pack

Battery


Lithium-ion battery 3.6 V, 2250 mAh

BARTEC Type: 17-21BE-M040/0000

Accessories for BCS 160BT^{ex}

- Base station with data transmission and charging function in Ex or non-Ex
- charging station
- Supply unit
- Connecting cable
- Bracket for wall/desk-top installation

Connection possibility

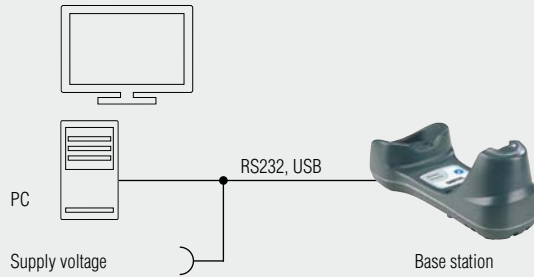

Safe area

Ex area

BCS 160^{ex} BT



1D barcodes captured:


Codabar	Mainland China
Code 11	Postal Code
Code 32	MSI/Plessey
Code 39	UK/Plessey
Code 93	Standard and Industrial 2 of 5
Code 128	Telepen
German ITF Postal Code	Telepen
Interleaved & Matrix 2 of 5	UPC-A
Limited/Expanded GS1 DataBar	UPC-E
	UCC/EAN-128

PDF barcodes captured:

(only with PDF Scan Engine)

Composite (type-dependent)
PDF417
MicroPDF417
Codablock F

Connection possibility

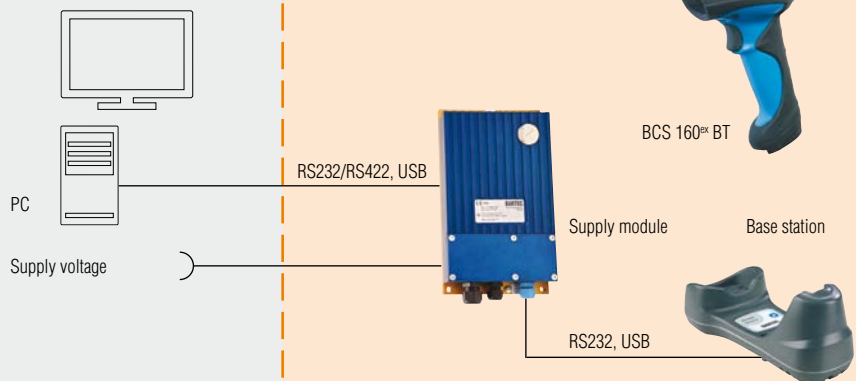


Safe area

Ex area

BCS 160^{ex} BT



Reading field

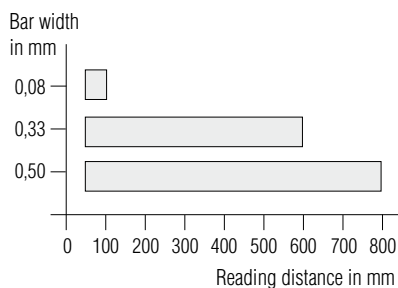

Selection chart

Barcode options	Code no.
1D Scan Engine	R
1D/PDF Scan Engine	T



Complete order no. 17-21BA-M32S/

000/0000

Radio hand-held scanner BCS 160^{ex} BT
without connection cable or base station

Note: further accessories must be ordered separately.

Please insert correct code. Technical data subject to change without notice.

למידע נוסף



0732001311



www.ateka.co.il



אפקון
מקבוצת
שלמה

אטקה